

ITS 323 – QUIZ 3 (CS)

First name: _____ Last name: _____

ID: _____

Total Marks: _____

out of 10

Question 1 [4 marks]

An error correcting code maps 2-bits of data into a 4 bit codeword according to the following scheme:

- 00 => 1001
- 01 => 0111
- 10 => 1011
- 11 => 1100

The Hamming distance is used to correct errors.

If the transmitted data is 10, for the following cases, indicate the received codeword and, if relevant, the received data. Also indicate the result at the received by circling one of:

- NO ERROR
- Successfully detected and corrected error (CORRECT)
- Detected, but could not correct (DETECT ONLY)
- Failed to detect or correct error (FAILED)

a) Second bit is in error

Received Codeword: _____ Received Data: _____
 NO ERROR CORRECT DETECT FAILED

b) First and second bit are in error

Received Codeword: _____ Received Data: _____
 NO ERROR CORRECT DETECT FAILED


c) All bits are in error

Received Codeword: _____ Received Data: _____
 NO ERROR CORRECT DETECT FAILED

- d) What is the maximum throughput of a link with data rate of 1Mb/s using the above error correction scheme?

Question 2 [2 marks]

Draw the analog signal used to transmit the digital data below if Binary Phase Shift Keying is used.

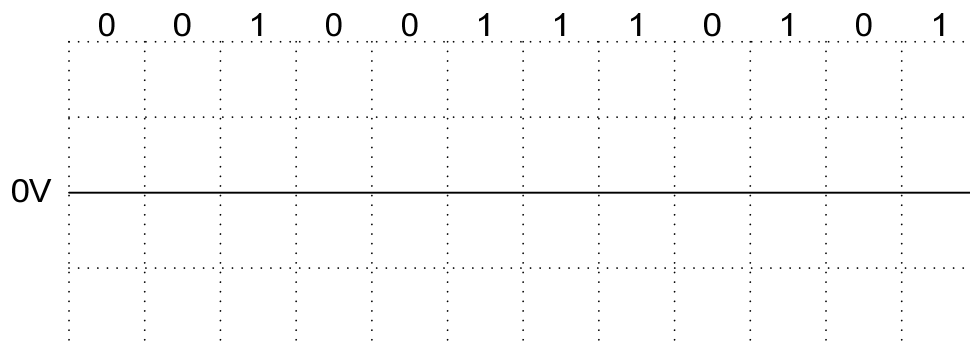

Question 3 [2 marks]

A single bit even parity check is added to the front of an 8-bit data frame (01101101). For the following received bits, indicate if the receiver can detect the error or not (circle the answer):

- | | | |
|--------------|--------|------------|
| a) 101111101 | DETECT | NOT DETECT |
| b) 101110101 | DETECT | NOT DETECT |
| c) 001101101 | DETECT | NOT DETECT |
| d) 000001101 | DETECT | NOT DETECT |

Question 4 [2 marks]

What is the maximum throughput of the Sliding Window Flow Control protocol with Window Size 3 and if the receiver sends an ACK (or Receive Ready) frame after receiving all frames within the window. [Hint: consider how long it takes to send a window of frames and receive the single ACK]

You can assume:

- Data rate is 1Mb/s
- Data frame size is 10,000 bits
- ACK size is 100 bits
- Propagation time is 10msec
- No processing delay